

**MADE IN
TURKEY**



OUTPUT VALUES

Standby Power	Voltage	230/400
Standby Power	kVA	165
Standby Power	kW	132
Standby Power	Amper	238
Prime Power	Voltage	230/400
Prime Power	kVA	150

Prime Power	kW	120
Prime Power	Amper	216

DIESEL ENGINE

Brand	PERKINS
Model	1106A-70TAG2
Max. Total Output Pow. (kWm/hp)	143,5 / 191,7
Cylinder Displacement (lt)	7,01
Cylinder Orientation	6 Single Line
Bore x Stroke(mm*mm)	105*127
Compression Ratio	18:2;1
Governor Type	Mechanic
Rotation	1500 RPM
Aspiration System	Natural
Injection	Direct
Cooling System	Water Cooled
Electrical System(V DC)	12
Oil Capacity (lt)	16
Engine Coolant Capacity (lt)	21
Fuel Cons. %50 (lt/h)	16
Fuel Cons. %75 (lt/h)	24
Fuel Cons. %100 (lt/h)	33


ALTERNATOR

Standby Power (kVa/kw)	165/132
Prime Power (kVa/kw)	150/120
Brand	LEROY SOMER
Output Voltage (V)	231/400
Frequency (Hz)	50
Stationary Vol. Regulation(±)	0,01
Short Circuit Current	%300 (10 sec)
Insulation	H
Protection	IP23
Efficiency (%)	92
Overloading	110% for 1 hour
Power Factor (cos Q=0.8)	0,8
Tot. Harmonic Dist. Rate	<1 %
Connection Type	Star
Number of Pole	4
Number of Bearing	Single

DIMENSIONS & WEIGHT

Without Canopy	Width	1100 mm
Without Canopy	Length	2500 mm
Without Canopy	High	1650 mm
Without Canopy	Weight	1525 kg

Without Canopy	Fuel Tank Capacity	280 lt
With Canopy	Width	1100 mm
With Canopy	Length	3100 mm
With Canopy	High	1900 mm
With Canopy	Weight	1955 kg
With Canopy	Fuel Tank Capacity	280 lt

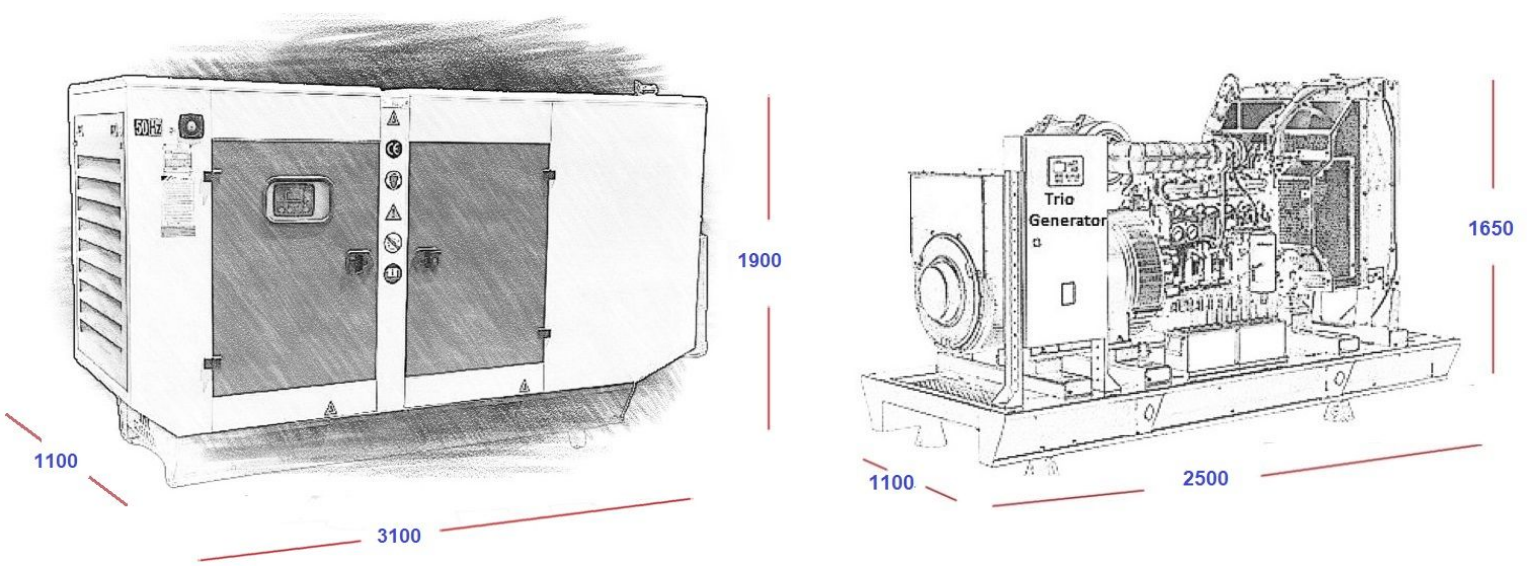

**MADE IN
TURKEY**